

45. Mounting in accordance with claim 44, wherein said erosion-resistant fiber mat sections have wave-shaped tongues and said swelling mat sections are pressure-resistant swelling mat sections with wave-shaped cutouts.

REMARKS

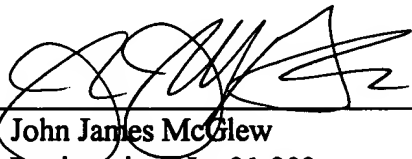
Claims 23 to 45 are in this application and are presented for consideration. Claims 1 to 22 have been canceled. The new claims present subject matter similar to the original claims, but in a different form.

The specification and claims have been amended in order to place this application in better form. The reference to claims in the specification has been deleted or amended. Appropriate headings have been added. No new matter has been added.

Favorable action on the merits is respectfully requested.

Respectfully submitted
for Applicant,

By: _____


John James McGlew
Registration No. 31,903
McGLEW AND TUTTLE, P.C.

JJM:jj
67066.1

Enclosed: Substitute Specification and Marked Up Copy Of Translation

DATED: July 27, 2000
SCARBOROUGH STATION
SCARBOROUGH, NEW YORK 10510-0827
(914) 941-5600

1000 999 998 997 996 995 994 993 992 991 990 989 988 987 986 985 984 983 982 981 980 979 978 977 976 975 974 973 972 971 970 969 968 967 966 965 964 963 962 961 960 959 958 957 956 955 954 953 952 951 950 949 948 947 946 945 944 943 942 941 940 939 938 937 936 935 934 933 932 931 930 929 928 927 926 925 924 923 922 921 920 919 918 917 916 915 914 913 912 911 910 909 908 907 906 905 904 903 902 901 900 899 898 897 896 895 894 893 892 891 890 889 888 887 886 885 884 883 882 881 880 879 878 877 876 875 874 873 872 871 870 869 868 867 866 865 864 863 862 861 860 859 858 857 856 855 854 853 852 851 850 849 848 847 846 845 844 843 842 841 840 839 838 837 836 835 834 833 832 831 830 829 828 827 826 825 824 823 822 821 820 819 818 817 816 815 814 813 812 811 810 809 808 807 806 805 804 803 802 801 800 799 798 797 796 795 794 793 792 791 790 789 788 787 786 785 784 783 782 781 780 779 778 777 776 775 774 773 772 771 770 769 768 767 766 765 764 763 762 761 760 759 758 757 756 755 754 753 752 751 750 749 748 747 746 745 744 743 742 741 740 739 738 737 736 735 734 733 732 731 730 729 728 727 726 725 724 723 722 721 720 719 718 717 716 715 714 713 712 711 710 709 708 707 706 705 704 703 702 701 700 699 698 697 696 695 694 693 692 691 690 689 688 687 686 685 684 683 682 681 680 679 678 677 676 675 674 673 672 671 670 669 668 667 666 665 664 663 662 661 660 659 658 657 656 655 654 653 652 651 650 649 648 647 646 645 644 643 642 641 640 639 638 637 636 635 634 633 632 631 630 629 628 627 626 625 624 623 622 621 620 619 618 617 616 615 614 613 612 611 610 609 608 607 606 605 604 603 602 601 600 599 598 597 596 595 594 593 592 591 590 589 588 587 586 585 584 583 582 581 580 579 578 577 576 575 574 573 572 571 570 569 568 567 566 565 564 563 562 561 560 559 558 557 556 555 554 553 552 551 550 549 548 547 546 545 544 543 542 541 540 539 538 537 536 535 534 533 532 531 530 529 528 527 526 525 524 523 522 521 520 519 518 517 516 515 514 513 512 511 510 509 508 507 506 505 504 503 502 501 500 499 498 497 496 495 494 493 492 491 490 489 488 487 486 485 484 483 482 481 480 479 478 477 476 475 474 473 472 471 470 469 468 467 466 465 464 463 462 461 460 459 458 457 456 455 454 453 452 451 450 449 448 447 446 445 444 443 442 441 440 439 438 437 436 435 434 433 432 431 430 429 428 427 426 425 424 423 422 421 420 419 418 417 416 415 414 413 412 411 410 409 408 407 406 405 404 403 402 401 400 399 398 397 396 395 394 393 392 391 390 389 388 387 386 385 384 383 382 381 380 379 378 377 376 375 374 373 372 371 370 369 368 367 366 365 364 363 362 361 360 359 358 357 356 355 354 353 352 351 350 349 348 347 346 345 344 343 342 341 340 339 338 337 336 335 334 333 332 331 330 329 328 327 326 325 324 323 322 321 320 319 318 317 316 315 314 313 312 311 310 309 308 307 306 305 304 303 302 301 300 299 298 297 296 295 294 293 292 291 290 289 288 287 286 285 284 283 282 281 280 279 278 277 276 275 274 273 272 271 270 269 268 267 266 265 264 263 262 261 260 259 258 257 256 255 254 253 252 251 250 249 248 247 246 245 244 243 242 241 240 239 238 237 236 235 234 233 232 231 230 229 228 227 226 225 224 223 222 221 220 219 218 217 216 215 214 213 212 211 210 209 208 207 206 205 204 203 202 201 200 199 198 197 196 195 194 193 192 191 190 189 188 187 186 185 184 183 182 181 180 179 178 177 176 175 174 173 172 171 170 169 168 167 166 165 164 163 162 161 160 159 158 157 156 155 154 153 152 151 150 149 148 147 146 145 144 143 142 141 140 139 138 137 136 135 134 133 132 131 130 129 128 127 126 125 124 123 122 121 120 119 118 117 116 115 114 113 112 111 110 109 108 107 106 105 104 103 102 101 100 99 98 97 96 95 94 93 92 91 90 89 88 87 86 85 84 83 82 81 80 79 78 77 76 75 74 73 72 71 70 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

Jonique Font

DATE: July 27, 2000

Docket # 67066

**PROCESS FOR HOLDING AND INSULATING CERAMIC
MONOLITHS
IN A MOTOR VEHICLE EXHAUST GAS UNIT
INCLUDING MOUNT MANUFACTURED
ACCORDING TO THIS PROCESS**

FIELD OF THE INVENTION

The present invention pertains to a process for holding or mounting and insulating ceramic monoliths in a motor vehicle exhaust gas unit, with a housing (pipe or half shells) preferably having a nonround (e.g., oval or triangular) cross section and with one or more inner ceramic monoliths of a corresponding cross section, wherein the ceramic monolith is wrapped with a mounting mat and is mounted in the housing and the mounting mat may have at least one

swelling mat, which is a mixture of ceramic fibers, expanded mica and organic binder. The present invention also pertains to a mount itself manufactured according to the above-described process.

BACKGROUND OF THE INVENTION

5 Mainly a swelling mat - a mixture of ceramic fibers, vermiculite micas and organic binders - is currently used to hold and insulate ceramic monoliths in motor vehicle exhaust gas units. The felt mat is wrapped around the monoliths and is pressed in height and thickness by insertion and closing the housing (or by pushing into a pipe or wrapping around with an open pipe and tensioning and closing the pipe). As a result, the swollen mat builds up a compressive strength against the monolith and the housing and holds the ceramic monoliths in the exhaust gas unit by friction between the monolith and the swelling mat, on the one hand, and between the housing and the swelling mat, on the other hand, under load exerted by the forces occurring during the operation (pressure loss on the monolith, acceleration forces on the system). When the temperature rises during the operation, the holding forces of the swelling mat increase due to the thermal tensioning of the vermiculite against the ceramic fibers. The pressing of the swelling mat increases with rising temperature and also with increasing friction. This functions very well in the case of round catalytic converters with uniform, circular gap. The swelling mat becomes adjusted with rising temperature considerably more than what the system loses in tension due to the housing pipe widening against the monolith due to thermal expansion.

10
15
20

However, geometrically more unfavorable shapes, such as triangles, polygons and flat ovals,

so-called racetracks, are also used besides round monoliths to utilize the free cross sections in the tunnel of a vehicle bottom for the largest possible cross-sectional areas of the monolith (to minimize the pressure loss).

In the case of such cross-sectional shapes, the rigidity of the housing is usually not sufficient during assembly or even during the operation to maintain a constant mounting gap for the swelling mat. Expansion by elasticity takes place in the larger radii or in the flatter areas of the housings during assembly and widening additionally takes place during the operation due to the increased pressing of the swelling mat under [elevated] temperature. This leads to a nonuniform pressure distribution on the circumference. The highest pressures and consequently the strongest holding forces are generated in the small radii of the cross section and the gaps increase at the large radii. However, the erosion resistance of the swelling mat decreases with increasing gaps. It becomes susceptible to gas pulsations penetrating into the swelling mat and to vibrations. The mica grains practically become detached from the composite and break apart the fibers located next to them in the case of small swelling mat thicknesses and very high loads (accelerations, pulsations, temperatures, and rates of temperature change). They create small cavities for themselves in the mat, which become increasingly larger during the further operation and finally lead to the emptying of the mat, to the formation of a nonpurified exhaust gas bypass flow around the monolith and ultimately to the separation of the monolith with complete failure of the system.

To take the above-mentioned problem fundamentally into account, it is proposed according to DE 296 11 788 U1 that more erosion-resistant mat inserts, namely, Saffil inserts, be used in the larger radii of oval housings and monoliths in the case of a composite mat, while the aforementioned swelling mat material can be maintained in the smaller radii as before. To save expensive Saffil in less critical areas, each Saffil insert has recesses or grooves, which extend flush end to end with corresponding projections or tongues of swelling mat sections, in the axial center of the patchwork mat. These individual mat sections are held together by an adhesive tape. The drawback is the sharp-edged, rectangular cut of the tongue-and groove connection at the joints, which continues to be associated with problems in terms of erosion at the projecting corners of the swelling mat and the tongues. Furthermore, difficulties arise in connection with handling and assembly, namely, the problem of projecting corners being caught and of these corners being folded over during the mounting in the half shell or in a tubular housing. Another drawback is the fact that a large amount of waste of the expensive Saffil inserts is generated when the inserts are cut out of a basic mat of the corresponding material. This also applies to the waste generated during the cutting out of the swelling mat sections.

The applicant's own patents DE 38 35 841 ("Soft Intermediate Ring at the End of or Between the Monoliths," EP 0 387 422 ("Ceramic Ring") and EP 0 472 009 ("Wire Mesh Between the Monoliths") shall be referred to concerning other prior art. Both interrupted swelling mats in mounts with a plurality of monoliths and setback swelling mats with edge protection arranged in front of them are described in these patents, and t. The edge protection

also consists of fibrous material with sealing function. The use of other materials at the transition between the monoliths in the swelling mat mount in the form of an inner swelling mat protection or of a completely different elastic part is also described there.

SUMMARY AND OBJECTS OF THE INVENTION

5 Based on the above-mentioned state of the art, the object of the present invention is to provide a process for holding and insulating ceramic monoliths in a housing of an exhaust gas unit of a motor vehicle of the type described in the introduction as well as such a holder or mount itself, which [process and holder] reliably prevent or at least minimize erosions in defined areas during the operation of the exhaust gas unit by means of simple measures.

10 ~~This object is accomplished by a process of the type described in claim 1.~~

~~Advantageous variants of the process are described in subclaims 2 through 16.~~

~~Expedient mounts and holders of ceramic monoliths in a motor vehicle exhaust gas [purification] housing are characterized by the features according to claims 17 through 22.~~

15 The essence of According to the present invention is that the mounting mat and/or the housing are designed chemically and/or structurally by the use of specific individual or combined measures for minimizing the erosion at least in the areas at risk of erosion or in the

areas in which damage has occurred.

The mounting mat is built up, in particular, of a plurality of layers and of at least two layers, wherein the individual layers are selected and/or cut in the proper configuration corresponding to the local function of the layer during the operation for minimizing the erosion of the mounting mat as a whole with respect to the material used.

Fiber felts and/or fabric mats, which are assigned to at least one of the following materials or product groups, are preferably used as the temperature- and oxidation-resistant individual mats of the mounting mat:

- leached glass,
- quartz glass,
- aluminum oxide,
- mixtures of aluminum oxide and silica,
- certain boron and/or zirconium contents.

An individual mat consisting of ceramic fiber fabric, which is composed of the above-mentioned materials, may be used as the preferably inner layer of the mounting mat facing the monolith.

A wire mesh, which is cut preferably narrower in the axial extension than the rest of the

mounting mat, is preferably used as the inner support of the mounting mat.

Local, erosion-minimizing areas of thickened material may be introduced into or applied to the individual mat, in which case the individual mat may have indentations or perforations in the area in which the areas of thickened material are introduced or applied, and the said indentations or perforations fit the areas of thickened material in a positive-locking manner, so that a flat top side is formed in the installed or inserted state of the areas of thickened material and thickness and pressure compensation is brought about as a result.

Fibers with a thickness of 6 to 12 μm are preferably used in individual mats in order to avoid health hazards during processing due to the respirability of fibers that are too fine and the skin irritation caused by fibers that are too thick.

Fiber mats which are designed for high and/or low operating temperatures of the exhaust gas unit may be used as the individual mat.

However, swelling mats, which are especially a combination of swelling and fiber mat sections arranged one behind the other, in which the connection joint of the individual swelling and fiber mat sections have a wavy shape, are also used as the individual mat.

In particular, an individual mat or the mounting mat is impregnated at least in the areas

at risk of erosion before they are wrapped around the ceramic monolith, the impregnation being performed on the side of the mat facing the monolith with diluted, heat-resistant adhesives made able to penetrate by means of a wetting agent, which are assigned to at least one of the following product groups:

- Colloidal solution of silicic acid dissolved in water,
- water glass,
- alkali siliconates, e.g., potassium methyl silicate,
- monoaluminum phosphate solution,
- aluminum chromium phosphate solution.

The adhesive is diluted during the impregnation to the extent that binder is present only in the contact areas between the fibers and optionally between the fibers and the mica.

In addition or as an alternative to this, the mounting mat may also be bonded to the ceramic monolith and/or the housing with a temperature-resistant mat adhesive, in which case the mat adhesive is applied to the inside of the housing and/or to the ceramic monolith and the mounting mat is inserted and mounted wet in the housing.

A mat adhesive used is assigned especially to one of the above-mentioned product groups.

The holding forces between the mounting mat and the housing are preferably brought about in a specific manner by positive locking, especially by increasing the surface roughness, before or during the assembly of the exhaust gas unit.

The surface roughness is increased, in particular, by milling or etching in rough areas, optionally by the use of a mat binder.

A pre-assembled phenolic resin adhesive film may be arranged on the outside of the mounting mat and inserted together with the mounting mat and it can bind on the inside of the housing during the operation of the exhaust gas unit during heating on the outside.

A multilayer mat, which is designed for the function during the operation of the exhaust gas unit, is used especially as a mounting mat in a special mounting of a ceramic monolith in a preferably nonround (e.g., oval or triangular) housing (pipe or half shells) of a motor vehicle exhaust gas unit, using a mounting mat having at least one swelling mat, in which case different swelling mats (with expanded mica) and/or fiber mats (without expanded mica or without granular components) may be provided on the inside and on the outside.

If the mounting mat has one or more fiber mats, the latter are preferably designed as shear-resistant mats.

A shear-resistant fiber mat has, in particular, oblique felt fibers, which extend at a flat angle of 5° to 60° from the underside to the top side of the mat and the ends of the felt fibers are bonded to the interfaces or to the underside and the top side of the mat.

As an alternative, a shear-resistant fiber mat may also have fibers that are arranged in loops over the thickness of the mat, in which case the loops are in contact with and are bonded to the top side and the underside of the mat.

An individual mat or the mounting mat itself is preferably composed in the circumferential direction of a ceramic monolith of swelling mat sections and intercalated fiber mat sections without granular components and without expanded mica, which are associated with the areas at risk of erosion, in which case the connection edges between the swelling mat sections and the fiber mat sections have a joint in a wavy shape and the mounting mat preferably faces the monolith.

The erosion-resistant fiber mat sections have wave-shaped tongues, while the pressure-resistant swelling mat sections have correspondingly wave-shaped cutouts.

The above-mentioned wave-shaped cut is a shape of a blank that is presented as a new cut here and it substantially differs from the sharp-edged, rectangular type of blank according to DE 296 11 788 U1 which was hitherto used. Since it is required for durable systems that the

joint be closed on the circumference, the length of the mat is selected to be such that it projects over the circumference (by about 3 mm) and is axially compressed at the joint during assembly as a result. Wave-shaped teeth are substantially more reliable in the process than a sharp-edged tongue-and-groove connection, because they engage one another better, the crumbly ends of the mat do not break off any longer, and projecting tips are no longer hung up during the closing of the half shells or during pushing into a jacket tube with the subsequent displacement and doubling of the mat in these areas. The shape of the wave-shaped teeth is selected to be such that the radii of the individual blanks engage one another and the mats, lying in contact with one another, can be cut out of the web-shaped raw material without cutting waste (cutting with a knife).

As was mentioned above, a preferred embodiment is a multilayer mounting mat, whose individual layers are tailored to the function during the operation of the exhaust gas unit. For example, different swelling mats and/or fiber mats may be provided on the inside and on the outside. Depending on the problems that occur, mats with high elasticity, high erosion resistance, swelling ability at low temperatures, swelling ability at high temperatures, resistance to extremely high temperatures or binders for defined temperatures over the extension of the mat (local) or in the depth of the mat (inner, outer or intermediate layer) are combined in order to obtain optimal function at an acceptable cost.

Especially preferable is, in particular, the bonding of the mats to the monolith and the

housing during the operation by means of suitable resin systems on the inside and/or the outside or the increasing of the friction by preparing the surface before or during the assembly (positive locking due to rough areas - milled-in or etched-in roughness, possibly with mat binder) to increase and stabilize the holding forces of the monolith.

5 An at least optional impregnation of the swelling mats and fiber mats to further increase the erosion resistance without a substantial reduction in elasticity is significant.

10 If fiber mats are present in a mounting mat, the fiber mats have a high shear resistance in order to transmit holding forces from the transition surfaces of the monolith to the mat and from the sheet metal jacket to the mat. Prior-art fiber mats are manufactured by laying the fibers layer by layer and subsequent needling or bonding. Interfaces, via which the mat slips apart, are formed over the height of the mat in the process. Mats according to the present invention are characterized by a different laying of the fibers and a different bonding of the mat. The individual fibers preferably extend at a flat angle of about 5° to 60° from the underside to the top side of the mat in order to make possible the bonding of the fibers ends at the interfaces in an optimal manner and yet to bring about a sufficient elasticity in the middle. Another possibility of achieving the elasticity and the shear resistance of a fiber mat is the design with loops, which are in contact with the top side and the underside.

~~The present invention will be described in greater detail below on the basis of exemplary~~

embodiments with reference to the drawings attached, in which

The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming a part of this disclosure. For a better understanding of the invention, its operating advantages and specific objects attained by its uses, reference is made to the accompanying drawings and descriptive matter in which preferred embodiments of the invention are illustrated.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

Figure 1 shows a four-layer mounting mat built up according to the present invention for holding and insulating ceramic monoliths in a tubular housing of oval cross section for a motor vehicle exhaust gas unit in a planar or unwrapped schematic perspective view;

Figure 2 shows the perspective view of the two oval ceramic monoliths to be introduced into the oval tubular housing;

Figure 3 shows a perspective exploded view of the mounting mat according to Figure 1;

Figure 4 shows a two-layer mounting mat built up according to the present invention in a view similar to Figure 1;

Figure 5 shows the mounting mat according to Figure 4 in a perspective exploded view similar to Figure 3;

Figure 6 shows a three-layer mounting mat built up according to the present invention, which is similar to that shown in Figures 1 and 4;

Figure 7 shows the mounting mat according to Figure 6 in a perspective exploded view similar to Figures 3 and 5;

Figure 8 shows another two-layer mounting mat in a view similar to Figure 1;

Figure 9 shows an exploded view of the two-layer mounting mat according to Figure 8;

Figure 10 shows another three-layer mounting mat similar to Figure 6;

Figure 11 shows an exploded view of the mounting mat according to Figure 10;

Figure 12 shows a schematic perspective view of a tubular housing with a surface roughened up on the inside;

Figure 13 shows another multilayer mounting mat in a view similar to Figure 1;

Figure 14 shows the raw material of a fiber mat immediately after a wave-shaped cut to represent the blank without waste of material due to clippings;

Figure 15 shows a schematic sectional view of a multilayer mounting mat;

Figure 16 shows the cross section of the oval tubular housing with mounted multilayer mounting layer according to Figure 13 and ceramic monolith according to Figure 2;

Figure 17 schematically shows the partial top view of another second layer of a mounting mat according to Figure 7, where the arrangement of the blank with a small amount of clipping waste is shown corresponding to Figure 14; and

Figure 18 shows a schematic axial section of an exhaust gas unit according to the present invention, in which a mounting mat for two ceramic monoliths in an oval tubular housing with oblique felt fibers bonded at the end is shown above the axial center line and a mounting mat with fibers in the form of loops is shown under

the axial center line.

According **DESCRIPTION OF THE PREFERRED EMBODIMENT**

Referring to the drawings in particular, a mount for holding and insulating two ceramic monoliths 1, 2 of an oval cross section, which are arranged one behind the other, comprises according to Figure 2 a mounting mat 4 in a correspondingly oval tubular housing 3 of a motor vehicle exhaust gas unit 20.

As is shown in principle in Figure 18, the mounting mat 4 is wrapped around the two ceramic monoliths 1, 2 and it correspondingly holds the ceramic monoliths 1, 2 in the tubular housing 3.

The mounting mat 4 and/or the tubular housing 3 has/have a special design and/or is/are specially treated chemically as will be specifically described below at least in the areas at risk of erosion A of a mounted mounting mat during the operation of the motor vehicle exhaust gas unit or in the areas in which damage has occurred.

Especially with reference to Figures 1 through 17, the mounting mat 4 has a multilayer design and consists of at least two layers, wherein the material of the individual layers is selected corresponding to the function of the layer during the operation and is optionally cut in the proper configuration and/or the material is thickened.

Fiber felts and/or fabric mats which are assigned to at least one of the following materials or product groups are used as temperature- and oxidation-resistant individual layers or individual mats of the mounting mat 4:

- leached glass,
- quartz glass,
- aluminum oxide,
- mixtures of aluminum oxide and silica,
- certain boron and/or zirconium contents.

Ceramic fiber fabrics as well as swelling mats which are a mixture of ceramic fibers, expanded mica and organic binder are also used as individual layers.

Wire mesh 21 or ceramic fabrics which are cut narrower in the axial extension of the mount than the rest of the mounting mat 4 may be used for support.

Areas of thickened material 22, 23 may be locally introduced into or applied to the individual layer as an erosion protection, in which case the individual mat may have indentations or perforations 24, which fit the areas of thickened material in a positive-locking manner, in the area in which the areas of thickened material 22, 23 are introduced or applied.

Fibers with a thickness of 6 to 12 μm are used in the individual mats.

A combination of swelling and fiber mat sections 5, 7 may be provided as individual mats, in which case the connection joint of the individual swelling and fiber mat sections has a wavy shape 11.

5 The individual mat or the mounting mat 4 may be impregnated at least in the areas A at risk of erosion before being wrapped around the ceramic monolith 1, 2, the impregnation being performed on the side of the mat facing the monolith with diluted, heat-resistant adhesives, which are made able to penetrate by means of a wetting agent and are assigned to at least one of the following product groups:

- 10
- Colloidal solution of silicic acid dissolved in water,
 - water glass,
 - alkali siliconates, e.g., potassium methyl silicate,
 - monoaluminum phosphate solution,
 - aluminum chromium phosphate solution.

15 The adhesive is diluted during the impregnation to the extent that binder is present only in the contact areas between the fibers and optionally between the fibers and the mica.

The mounting mat 4 may be bonded to the ceramic monolith 1, 2 and/or to the tubular

housing 3 with a temperature-resistant mat adhesive, in which case the mat adhesive is applied to the inside of the tubular housing 3 and/or to the ceramic monolith 1, 2 and the mounting mat 4 is inserted and mounted wet in the tubular housing 3.

The mat adhesive belongs to the product group of the adhesives that are used for impregnation.

With special reference to the embodiment variant according to Figures 1 and 3, a four-layer mounting mat 4 is provided, whose lowermost layer facing the tubular housing 3 is a swelling mat 6, which is designed for a low temperature with corresponding mica contents in the swelling mat such that sufficient expansion of the swelling mat takes place already at a low operating temperature.

The above-mentioned swelling mat 6 is joined by another swelling mat 5, which is designed for a higher operating temperature with a smaller mica content in the swelling mat.

The swelling mat 5 is joined on the inside by a layer of a ceramic fabric 20, which forms an erosion protection means.

The above-mentioned three individual layers may also be fiber mats, which are designed for low and higher operating temperatures corresponding to the layers 6 and 5 and for erosion

protection corresponding to layer 20.

A wire mesh 21 acting as a support for the above-mentioned three layers, which may also be a ceramic fabric, is provided as the fourth layer of the mounting mat 4 facing the monolith 1, 2.

5 All layers may be bonded to one another as well as to the tubular housing 3 and/or to the monoliths 1, 2 by means of adhesives. The individual layers may have different fiber directions for improved hold of the layers with one another.

10 It shall be mentioned concerning the configuration of the above-mentioned four individual layers that the wire mesh 21 is cut considerably narrower than the remaining three layers.

15 The ends on the left and right of the individual layers 6, 5, 20 according to Figures 1 and 3 have a wavy shape 11 to create an optimal joint during a 360° wrapping, as was described in the introduction. The layers 5 and 20 now have identical wave-shaped tongues 12 at the left-hand end of the layer and corresponding wave-shaped cutouts 13 at the right-hand end of the layer, while the wave-shaped tongue 12 and the wave-shaped cutout 13 of the layer 6 are provided reversed at the other ends in order to bring about an overlap in the joint area of the individual layers during the wrapping of the mounting mat 4 around the monolith, as can be

seen especially in Figure 1.

The embodiment variant of a mounting mat 4 according to Figures 4 and 5 comprises two layers: One holding mat 26 with an inner erosion protection brought about by impregnating the area A at risk of erosion with an adhesive as described above, which may be a swelling mat or a fiber mat, as well as an inner support in the form of a wire mesh 21 or of a ceramic fabric, as in the first exemplary embodiment according to Figures 1 and 3. The holding mat 26 has a wavy shape 11 at the end as do the layers 5, 20 in the first exemplary embodiment.

The third embodiment variant of a mounting mat 4 according to Figures 6 and 7 corresponds essentially to that according to Figures 4 and 5. However, no impregnation is provided here, but an additional "intermediate layer" is provided instead between the wire mesh 21 and the holding mat 26 in the form of local areas of thickened material 22 and 23 (fiber mat, fiber fabric, braiding), which have an oval shape and a thickness of about 2 mm in the exemplary embodiment shown, to provide erosion protection for areas at risk of erosion A of the holding mat 26 and the swelling mat.

Instead of the oval shape, other configurations may also be considered, e.g., a rounded "cloverleaf shape" of an individual leaf according to Figure 17, in which case a plurality of "cloverleaves" may be arranged at closely spaced locations next to one another in order to enlarge the area or to enlarge the area protected from erosion, such that practically no

intermediate spaces are formed, i.e., larger areas can be covered, optionally using a complete intermediate layer of the size of the holding mat 26.

As can also be seen in Figure 17, only a small amount of cutting waste of the expensive material is generated in the case of a "cloverleaf shape." Nevertheless, the wavy shape is prepared basically similarly to the individual layers according to Figure 3 with the advantages associated therewith.

The fourth embodiment variant of a mounting mat 4 according to Figures 8 and 9 has a two-layer design and has a holding mat 26 in the form of a swelling mat as well as strip-shaped areas of thickened material 22 and 23 in a wavy shape 11 as an erosion protection in the area of erosion hazard A. The strips extend (contrary to the ovals 22, 23 according to Figure 7) over the entire width of the mounting mat 4.

The fifth embodiment variant according to Figures 10 and 11 corresponds essentially to that according to Figures 6 and 7. However, not only are local areas of thickened material 22, 23 of an oval shape provided, but thickness and pressure compensation is provided for the above-mentioned ovals over the entire extension of the mat by means of an intermediate mat 27 (swelling mat, fiber mat), which has oval perforations 24 for the positive-locking fitting of the ovals.

In another design of the present invention, the holding forces between the mounting mat 4 and the tubular housing 3 can be brought about in a specific manner by positive locking, especially by increasing the surface roughness, before or during the assembly of an exhaust gas unit. In particular, the surface roughness can be increased by milling or etching in rough areas. Figure 12 correspondingly shows an oval tubular housing 3 with a surface 14 roughened on the inside for the positive-locking holding of a mounting mat 4 to be accommodated. A lubricant is used as an assembly aid for pushing in the mounting mat.

Figure 13 illustrates the design of a multilayer mounting mat 4. A layer of an individual mat consisting alternately of swelling mat sections 5 for expansion at high temperature and erosion-resistant fiber mat sections 7, where the connecting joint has a wavy shape 11, is located inside in close proximity of the monoliths 1, 2. A phenolic resin film carrier 15 designed as an adhesive layer is located on the outside in the direction of the inside of the tubular housing 3. A layer of another swelling mat 6 of such a consistency of mica components that expansion occurs already at low temperature is located between the adhesive layer and the above-mentioned combined individual mat. A preassembled phenolic resin adhesive film 15 is arranged on the outside of the mounting mat 4 for assembly and is inserted together with the mounting mat 4 and is bonded to the inside of the tubular housing 3 during the operation of the exhaust gas unit during heating on the outside.

As can be determined from Figure 14, a fiber mat 4 can be prepared in the form of a

wave-shaped blank 11 without cutting waste.

Figure 15 illustrates a cross section through a multilayer mounting mat 4, while Figure 16 shows the overall arrangement of the exhaust gas unit 20 after mounting in a schematic cross section.

Figure 18 shows a motor vehicle exhaust gas unit 20 with an oval tubular housing 3, in which two ceramic monoliths 1, 2 are arranged one behind the other.

The ceramic monoliths 1, 2 are held in a wrapped-around mounting mat 4.

The mounting mat 4 according to Figure 18, top, is composed of felt fibers which are arranged obliquely to the axial axis at an angle α of approx. 30° and are bonded at the end to the interfaces 9, 10.

The mounting mat 4 according to Figure 18, bottom, is composed of fibers that extend in loops over the thickness of the mounting mat, wherein the loops 11 are bonded in the area of the interfaces 9, 10.

It shall also be noted that the independently patentable features contained in the subclaims shall have corresponding independent protection despite the formal reference to the

Patent Claims

1. ~~Process for holding~~ While specific embodiments of the invention have been shown
and described in detail to illustrate the application of the principles of the invention, it
will be understood that the invention may be embodied otherwise without departing
from such principles.

ABSTRACT OF THE DISCLOSURE

According to the invention, a special bearing mat (4) is used for mounting and insulating said ceramic monoliths (1, 2) in a said motor vehicle exhaust gas unit (20), with a said housing (3) (pipe or half shells) preferably having a nonround (e.g., oval or triangular) cross section and with one or more said inner ceramic monoliths (1, 2) of a corresponding preferably oval housing (3) of an automobile exhaust system (20), especially for non-round housing cross section, wherein a said mounting mat (4) is wrapped around the ceramic monolith and is mounted in the said housing (3) and the said mounting mat (4) may have at least one said swelling mat (5, 6), which is a mixture of ceramic fibers, expanded mica and organic binder,

— characterized in that

— the said mounting sections. Said bearing mat (4) and/or the said housing (3) is treated chemically and/or structurally for minimizing the erosion at least in the said areas at risk of erosion (A) or in the areas in which damage has occurred.

2. — Process in accordance with claim 1,

— characterized in that

— the said mounting mat (4) has a multilayer design consisting of at least two layers, wherein the material used for the individual layers is selected corresponding to the function of the layer during the operation for minimizing the erosion of the said

mounting mat (4) as a whole and/or is cut in the proper configuration:

3. ~~Process in accordance with claim 2;~~

~~characterized in that~~

~~fiber felts and/or fabric mats which are assigned to at least one of the following materials or product groups are used as the temperature- and oxidation-resistant individual mats of the said mounting mat (4):~~

~~- Leached glass~~

~~- quartz glass~~

~~- aluminum oxide~~

~~- mixtures of aluminum oxide and silica~~

~~- certain boron and/or zirconium contents.~~

4. ~~Process in accordance with claim 2 or 3;~~

~~characterized in that~~

~~an individual mat consisting of said ceramic fiber fabric (20) is used as the preferably inner layer of the said mounting mat (4) facing the said housing (3).~~

5. ~~Process in accordance with one of the claims 2 through 4;~~

~~characterized in that~~

~~a said wire mesh (21), which is cut narrower preferably in the axial extension of the~~

mount than the rest of the said mounting mat (4), is used as the inner support of the said mounting mat (4).

6. — Process in accordance with one of the claims 2 through 5,

— characterized in that

— said local erosion-minimizing areas of thickened material (22, 23) are introduced into or applied to the individual mat, wherein the individual mat may have said indentations or perforations (24), which fit the areas of thickened material in a positive-locking manner, in the area in which the said areas of thickened material (22, 23) are introduced or applied.

7. — Process in accordance with one of the claims 2 through 6,

— characterized in that

— fibers with a thickness of 6 to 12 μm are used in the individual mats.

8. — Process in accordance with one of the claims 2 through 6,

— characterized in that

— a swelling mat is used as the individual mat.

9. — Process in accordance with claim 8,

— characterized in that

~~a combination of said swelling mat and fiber mat sections (5, 6) arranged one behind the other is used as the individual mat, wherein the connection joint of the individual swelling mat and fiber mat sections has a said wavy shape (11):~~

~~10. Process in accordance with one of the claims 1 through 9,~~

~~characterized in that~~

~~the individual mat or the said mounting mat (4) is impregnated in the said areas at risk of erosion (A) before being wrapped around the said ceramic monoliths (1, 2), wherein the impregnation is performed on the side of the mat facing the monolith with diluted, heat-resistant adhesives, which are made able to penetrate with a wetting agent and are assigned to at least one of the following product groups:~~

~~- Colloidal solution of silicic acid dissolved in water,~~

~~- water glass,~~

~~- alkali siliconates, e.g., potassium methyl silicate,~~

~~- monoaluminum phosphate solution, and~~

~~- aluminum chromium phosphate solution.~~

~~11. Process in accordance with claim 10,~~

~~characterized in that~~

~~the adhesive is diluted during the impregnation to the extent that binder is present only in the contact areas between the fibers and optionally between the fibers and the mica~~

binder.

~~12. Process in accordance with one of the claims 1 through 11,~~

~~characterized in that~~

~~the said mounting mat (4) is bonded to the said ceramic monolith (1, 2) and/or the said housing (3) with a temperature-resistant mat adhesive, wherein the mat adhesive is applied to the inside of the said housing (3) and/or to the said ceramic monolith (1, 2) and the said mounting mat (4) is inserted and is mounted wet in the said housing (3).~~

~~13. Process in accordance with claim 12,~~

~~characterized in that~~

~~a mat adhesive that is assigned to at least one of the following product groups is used:~~

~~- Colloidal solution of silicic acid dissolved in water,~~

~~- water glass,~~

~~- alkali siliconates, e.g., potassium methyl silicate,~~

~~- monoaluminum phosphate solution, and~~

~~- aluminum chromium phosphate solution.~~

~~14. Process in accordance with one of the claims 1 through 13,~~

~~characterized in that~~

~~the holding forces between the said mounting mat (4) and the said housing (3) are~~

90 brought about in a specific manner by positive locking, especially by increasing the surface roughness, before or during the assembly of the said exhaust gas unit (20).

15. ~~Process in accordance with claim 14,~~

~~characterized in that~~

~~the surface roughness is increased by milling or etching in said rough areas (14),~~

95 optionally using a mat binder.

16. ~~Process in accordance with one of the claims 1 through 15,~~

~~characterized in that~~

100 ~~a said preassembled phenolic resin adhesive film (15) is arranged on the outside of the said mounting mat (4) and is inserted together with the mounting mat and is bonded on the inside of the said housing (3) during the operation~~
is/are specially structured and/or chemically treated, especially impregnated at the points which are at risk of eroding (A) in order to increase resistance to erosion. The bearing mat (4) is adapted to suit the functioning of the exhaust gas unit during heating on the outside.

105 17. ~~Mounting of at least one said ceramic monolith (1, 2) in a said, preferably nonround (e.g., oval or triangular) housing (3) (pipe or half shells) of a said motor vehicle exhaust unit (20) using a said mounting mat (4), which has at least one said swelling mat (5, 6), designed according to a process in accordance with claims 1 through 16,~~

~~characterized in that~~

~~the said mounting mat (4) is a multilayer mat tailored to the function during the operation of the said exhaust gas unit (20), wherein said different swelling mats (5, 6) (with expanded mica) and/or said fiber mats (7) (without expanded mica or without granular components) may be provided on the inside and on the outside.~~

~~18. Mounting in accordance with one of the claims 1 through 17,~~

~~characterized in that~~

~~the said fiber mat (7) of one said mounting mat (4) is designed as a shear-resistant mat.~~

~~19. Mounting in accordance with claim 18,~~

~~characterized in that~~

~~the said shear-resistant fiber mat (7) has said oblique felt fibers (8), which extend at a flat angle (α) of 5° to 60° from the said underside to the said top side (9 and 10; respectively), of the mat and the ends of the felt fibers are bonded on the interfaces or the said underside and top side (9, 10) of the mat.~~

~~20. Mounting in accordance with claim 19,~~

~~characterized in that~~

~~the said shear-resistant fiber mat (7) has fibers that are arranged in said loops (11) over the thickness of the mat, wherein the loops are in contact with and bonded on the said~~

~~top side and the said underside (10, 9) of the mat.~~

~~21. Mounting in accordance with one of the claims 1 through 20,~~

~~characterized in that~~

~~an individual mat or the said mounting mat (4) is composed, in the circumferential direction of a said ceramic monolith (1, 2), of said swelling mat sections (5) and said intercalated fiber mat sections (7) without granular components and without expanded mica, which are associated with the said areas (A) at risk of erosion, wherein the connection edges between the swelling mat sections and the fiber mat sections have a mutually meshing joint in a said wavy shape (11) and the said individual mat preferably faces the said ceramic monolith (1, 2).~~

~~22. Mounting in accordance with claim 21,~~

~~characterized in that~~

~~the said erosion-resistant fiber mat sections (7) have said wave-shaped tongues (12) and the said pressure-resistant swelling mat sections (5) have said wave-shaped cutouts (13).~~

system (20) during operation and is especially configured with several layers

004000" 04523560

670662